
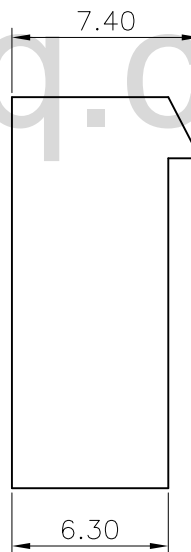


◆ SPECIFICATIONS

Current rating: 7A AC, DC
 Voltage rating: 250V AC, DC
 Temperature range: -25°C ~ +85°C
 Insulation resistance: 1000MΩ Min.
 Withstanding voltage: 1500V AC/ minute.
 Contact resistance: 20mΩ Max.

Material: Nylon 66, UL94 V-2
 Suitable: KR3960 series terminal
 Mates with KR3960 series wafer

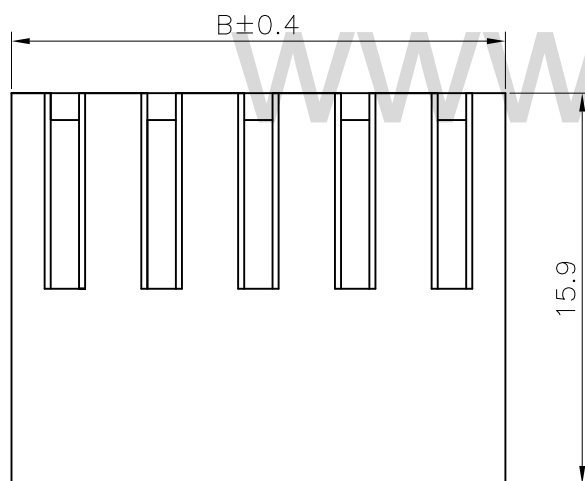

PART No.	Dimension	
	A	B
A3960O00243P60	3.96	8.42
A3960O00343P60	7.92	12.38
A3960O00443P60	11.88	16.34
A3960O00543P60	15.84	20.30
A3960O00643P60	19.80	24.26
A3960O00743P60	23.76	28.22
A3960O00843P60	27.72	32.18
A3960O00943P60	31.68	36.14
A3960O01043P60	35.64	40.10
A3960O01143P60	39.60	44.06
A3960O01243P60	43.56	48.02

www.krljq.com

△				GENERAL TOLERANCE	UNIT: mm	DATE	TITLE: MX 3.96 Housing		
△				.X±0.30	X°±1°	DRAWN: 闵昕皓	2013.01.02		
△				.XX±0.20	.X°±	CHECKED:			
△				.XXX±0.10	.XX°±	APPROVED:			
LTR	NAME	DATE	VERSION RECORD				VER.	SCALE:	N/A
1							A	SHEET:	1/1


东莞市康瑞电子有限公司
 DongGuan A Rui Electronic Co. LTD.

PROJECT	PART NO.	A3960O***43P60
DRAWING NO.		3960H01-4-S

