
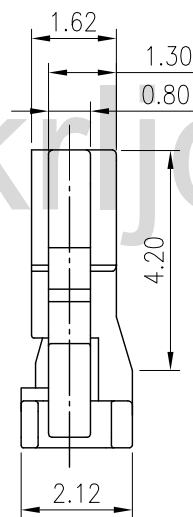


**SPECIFICATIONS**  
 Current rating: 1A AC, DC.  
 Voltage rating: 100V AC, DC.  
 Temperature range: -25°C ~ +85°C.  
 Insulation resistance: 100MΩ/ min.  
 Withstanding voltage: 250V AC/ minute.  
 Contact resistance: 30mΩ / max.

Material: Nylon 66 UL94V-0  
 Suitable KR1253 Series Terminal

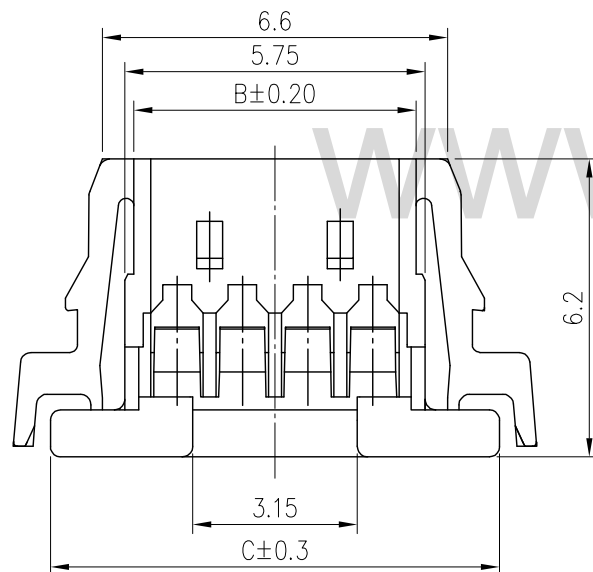

cir- cuits	Part No.	Dimension mm		
		A	B	C
02	A1260O0021*P60	1.25	2.90	6.10
03	A1260O0031*P60	2.50	4.15	7.35
04	A1260O0041*P60	3.75	5.40	8.60
05	A1260O0051*P60	5.00	6.65	9.85
06	A1260O0061*P60	6.25	7.90	11.1
07	A1260O0071*P60	7.50	9.15	12.35
08	A1260O0081*P60	8.75	10.40	13.60
09	A1260O0091*P60	10.00	11.65	14.85
10	A1260O0101*P60	11.25	12.90	16.10
11	A1260O0111*P60	12.50	14.15	17.35
12	A1260O0121*P60	13.75	15.40	18.60
14	A1260O0141*P60	16.25	17.90	21.10
15	A1260O0151*P60	17.50	19.15	22.35
20	A1260O0201*P60	23.75	25.40	28.60
30	A1260O0301*P60	36.25	37.90	41.10

www.krljq.com

F	④				GENERAL TOLERANCE	UNIT: mm	DATE	TITLE: MX 1.25 超薄 带扣 Housing			东莞市康瑞电子有限公司 DongGuan A Rui Electronic Co. LTD.			
	③				.X±0.30	X° ±1°	DRAWN: 朱佑武					2012.09.25		
	②				.XX±0.20	.X° ±	CHECKED:		VER.	SCALE:	N/A	PROJECT	PART NO.	A1260O***1*P60
	①				.XXX±0.10	.XX° ±	APPROVED:		A	SHEET:	1/1	DRAWING NO. 1260H01-1-S		
	LTR	NAME	DATE	VERISION RECORD										
	1	2	3	4	5	6	7	8	9					